


The Celano™

FP5420PW



SPECIFICATION SHEET

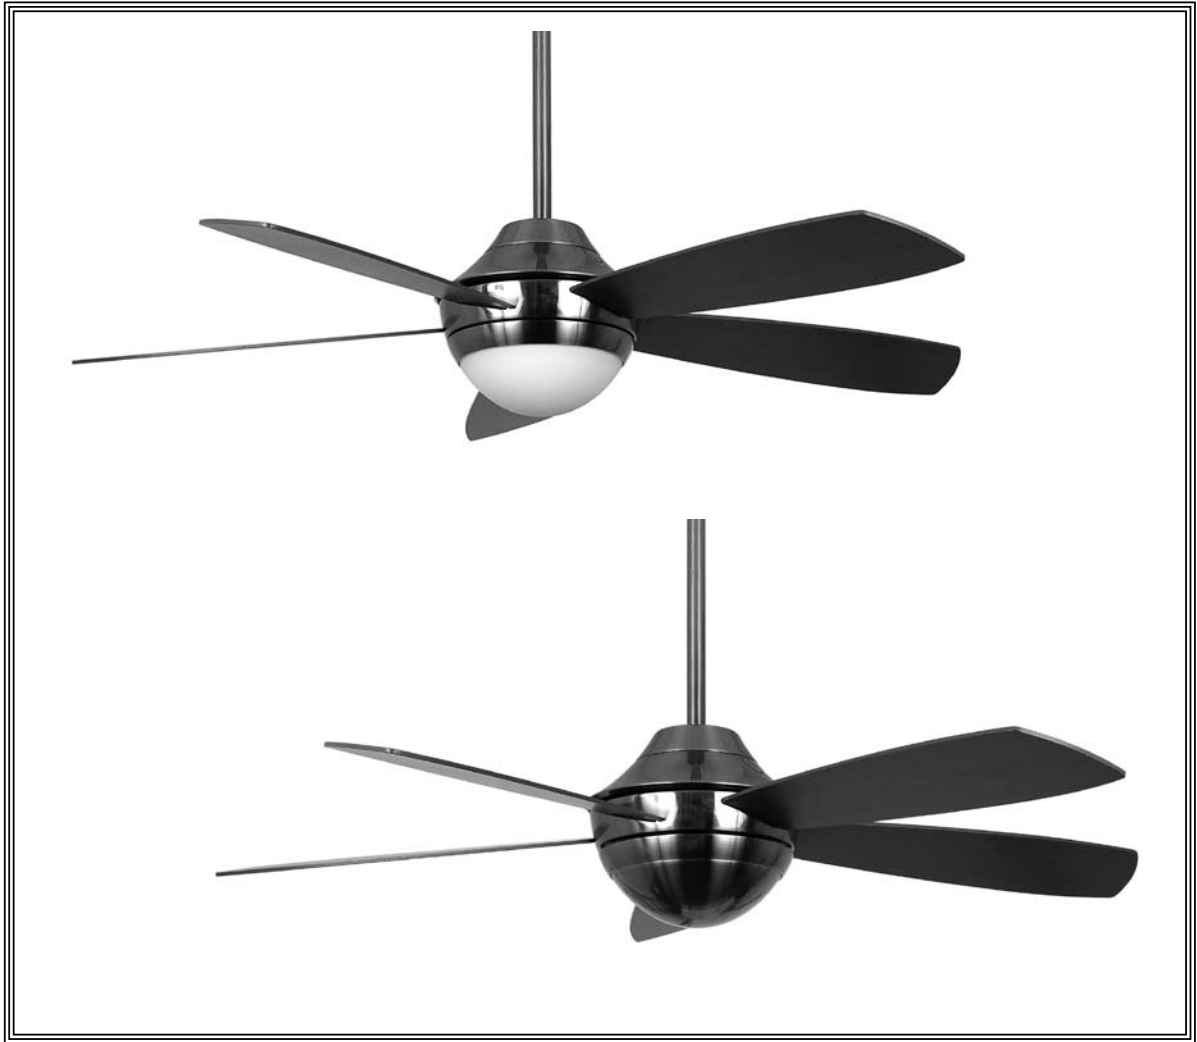

celebrating 25 years

Product Specifications Subject To Change

The Celano™ Fan Assembly – FP5420PW



Fan Assembly - FP5420PW	
Distance from Ceiling to Blade Edge (with 6" DR)	11.6"
Blade Sweep / Pitch	54" / 14°
Canopy Diameter	6½"
Net Hanging Weight: (with Light Kit)	29 lbs

Dimensions shown in inches

Available Finish	
PW	Pewter with Opal/Frosted Glass

Distance from Ceiling to Bottom of Fan	
Fan w/6" downrod	18"
Fan w/12" downrod	24"
Fan w/18" downrod	30"
Fan w/24" downrod	36"
Fan w/36" downrod	48"
Fan w/48" downrod	60"
Fan w/60" downrod	72"
Fan w/72" downrod	84"

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	149	5882	74	0.66	79
Med	81	3108	111	0.46	28
Low	45	1351	117	0.32	12



INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 20 motor is designed for optimal performance with this fan.

BLADES:

A set of five walnut finish wood blades is included. Optional A set of five cherry wood blades (B5400CY) is available—sold separately.

CONTROL OPTIONS:

C24 hand-held remote control with canopy-style receiver unit (RECFP5420) included. Push button remote control has 3 fan speeds, infinite light levels and off button Reversing switch located on fan housing. Optional C25 wall control is available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

3-bulb downlight fixture with three 40-watt candelabra bulbs is included. Maximum downlight wattage is not to exceed 120 watts.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Optional Decorative DR Sleeve (DRS54PW) is available, requires an 18" or longer downrod. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.



Copyright 2009 Fanimation, Inc.

10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215
Outside U.S. call (317) 733-4113
Visit Our Website www.fanimation.com



2009/01