

The Kubix™

FP4420 Series




SPECIFICATION SHEET



celebrating 25 years

Product Specifications Subject To Change

The Kubix™ Fan Assembly – FP4420**

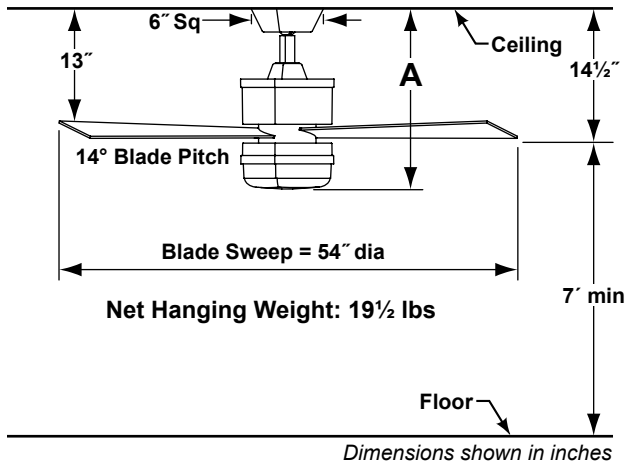

Available Finishes	
OB	Oil-Rubbed Bronze with Opal/Frosted Glass
SN	Satin Nickel with Opal/Frosted Glass

Distance from Ceiling to Bottom of Fan	A
Fan w/6" downrod	19 1/4"
Fan w/12" downrod	25 1/4"
Fan w/18" downrod	31 1/4"
Fan w/24" downrod	37 1/4"
Fan w/36" downrod	49 1/4"
Fan w/48" downrod	61 1/4"
Fan w/60" downrod	73 1/4"
Fan w/72" downrod	85 1/4"

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	138	4565	83	0.47	55
Med	89	2805	110	0.37	25
Low	58	1647	129	0.28	13

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 18 motor is designed for optimal performance with this fan.

BLADES:

A set of three 26" reversible, cherry/walnut, wood blades is included. Optional sets of three 20" wood blades are available in reversible cherry/walnut (B4442CWR) and satin nickel (B4442SN) finishes—sold separately. Optional sets of three 20" composite blades are available in cherry (BPW4442CY) and walnut (BPW4442WA) finishes—sold separately.

CONTROL OPTIONS:

C27 3-wire wall control is included. Wall control unit has 4 speeds and infinitely varying down light controls. Optional C4 remote control with canopy-style receiver unit is available—sold separately. Instructions are provided with each control.

LIGHTING OPTION:

2-bulb downlight fixture with two 60-watt candelabra bulbs is included. Maximum downlight wattage is not to exceed 120 watts.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6) and square downrod sleeve. Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only, however, is damp location rated if used with composite blades listed above.



10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website www.fanimation.com

