


The Vetricco[®]

FP3120 Series




SPECIFICATION SHEET

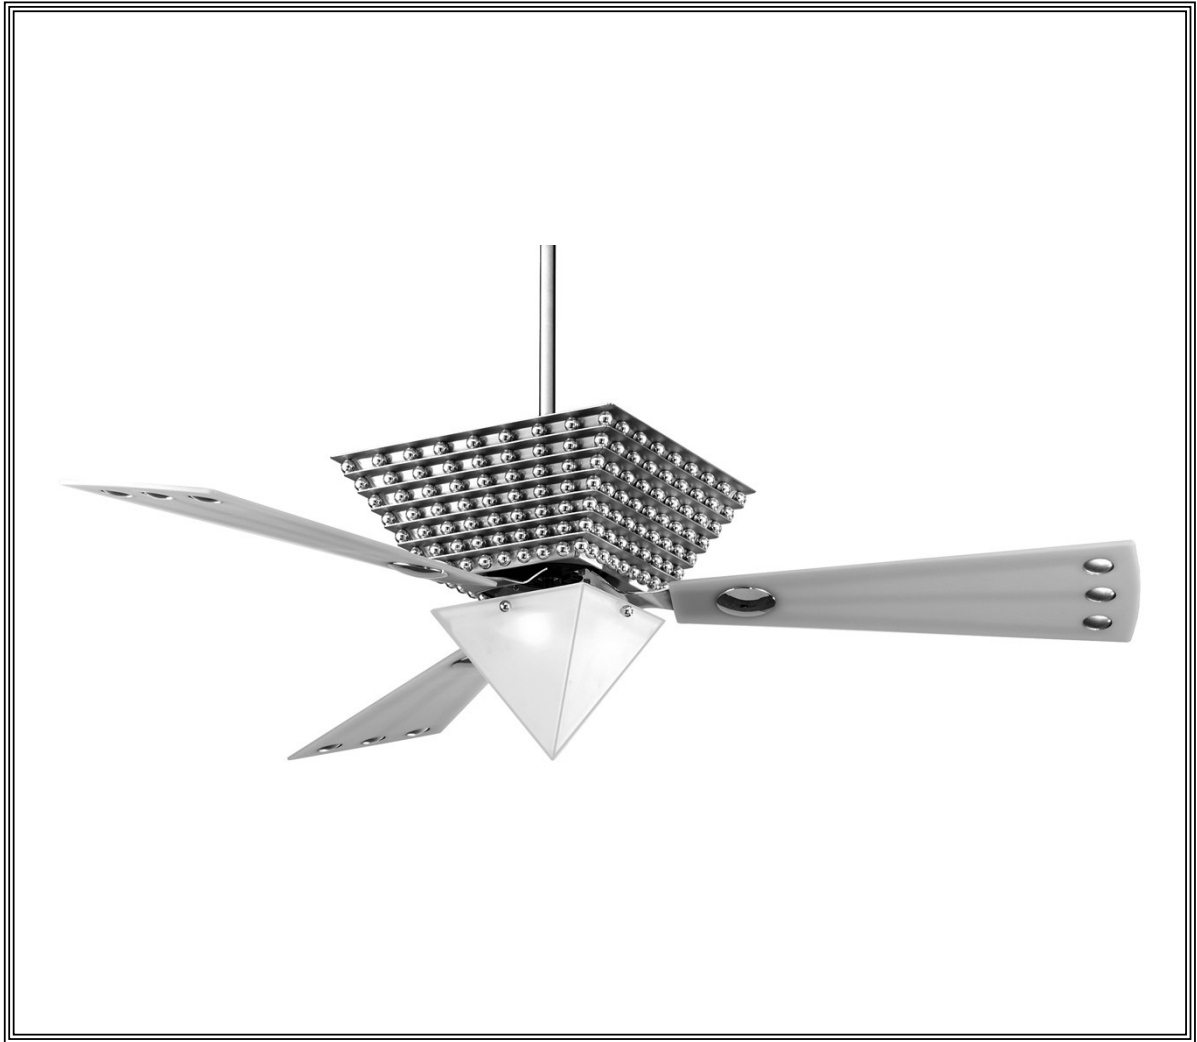

celebrating 25 years

Product Specifications subject to change

The Vetricco® Fan Assembly – FP3120**

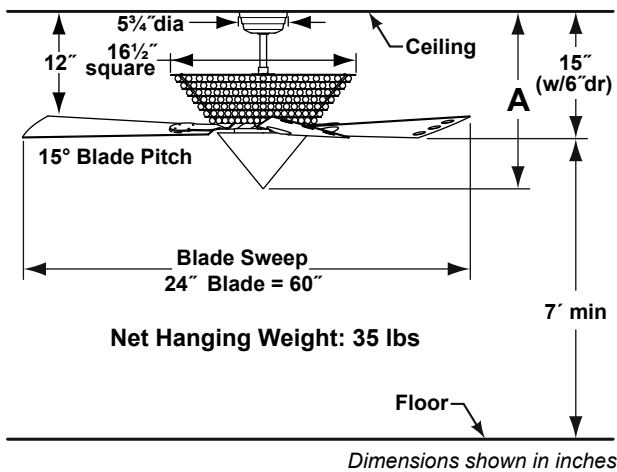

Available Finishes		Distance from Ceiling to Bottom of Fan	A
GB	Glossy Black/Chrome Balls	Fan w/6" downrod	23"
SN	Satin Nickel/Chrome Balls	Fan w/12" downrod	29"
		Fan w/18" downrod	35"
		Fan w/24" downrod	41"
		Fan w/36" downrod	53"
		Fan w/48" downrod	65"
		Fan w/60" downrod	77"
		Fan w/72" downrod	89"

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	152	7094	87	0.68	82
Med	112	5053	106	0.76	48
Low	75	3336	142	0.43	24

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 220 VAC, 50 Hz export version is available (Satin Nickel finish only).

CONTROL OPTIONS:

The hand-held remote control (C26) and canopy-style receiver unit (RECAN68UD) are included. Push button control with frequency code settings located on both the transmitter and the receiver units. Each push button unit will consist of 3 separate fan speeds, infinite light levels, and off button. Reversing switch located inside fan housing on upper socket housing. Optional controls are: C2 wall control; C9 wall control used with canopy receiver. Installation and operating instructions provided with control. Installation and operating instructions provided with control.

LIGHTING OPTIONS:

The 3-bulb (25 watt max) uplight and 3-bulb (25 watt max) downlight fixtures are included with this fan assembly with a maximum of 150 watts (candelabra bulbs - included). Maximum uplight and downlight wattage not to exceed 150 watts.

DOWN ROD OPTIONS:

The Vetricco® fan comes with a standard 6" down rod. Optional down rods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer down rod, a down rod coupler is available. The Vetricco® fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a down rod longer than the standard 6" down rod. Optional sloped ceiling ball kits (SCB52) are available for up to 52°. Call tech support for more information.

BLADE SETS:

A set of 3 composite blades are included with this fan.

DAMP LOCATION:

Fan not rated for Damp Location usage.



Copyright 2009 Fanimation, Inc.

10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215

Outside U.S. call (317) 733-4113
Visit Our Website www.fanimation.com



2009/01