


The Volare[®]

FP4210 Series




SPECIFICATION SHEET

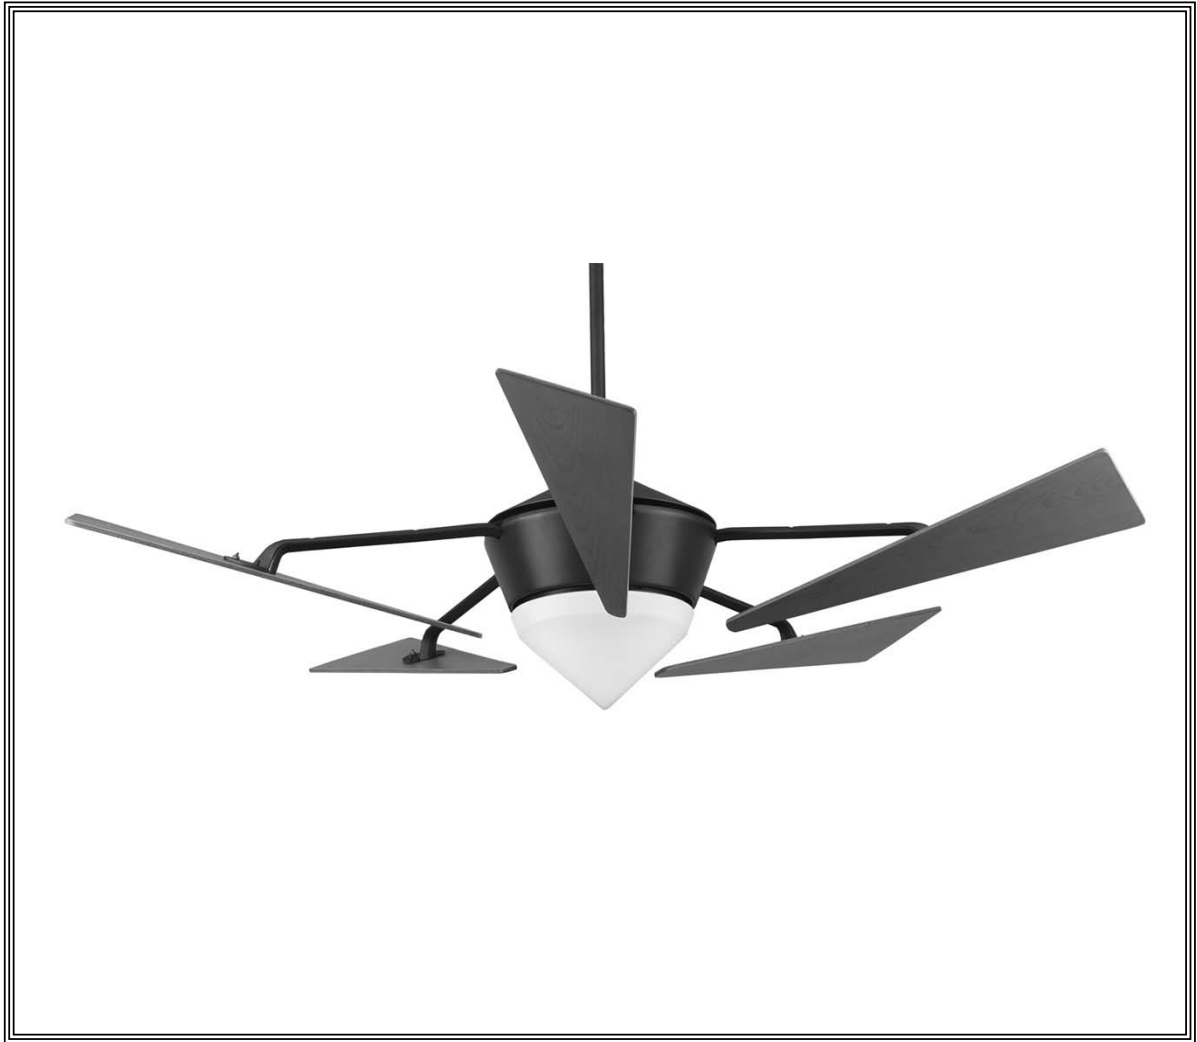

celebrating 25 years

Product Specifications subject to change

The Volare[®] Fan Assembly – FP4210**

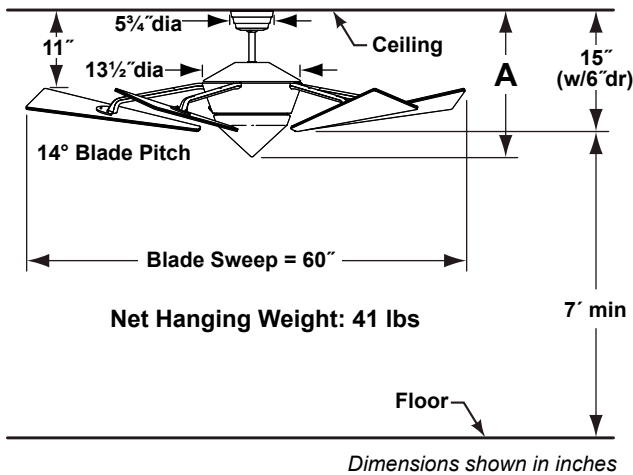

Available Finishes	
CH	Chrome with Mahogany Blades
OB	Oil-Rubbed Bronze with Cherry Blades
SN	Satin Nickel with Maple Blades

Distance from Ceiling to Bottom of Fan	A
Fan w/6" downrod	19"
Fan w/12" downrod	25"
Fan w/18" downrod	31"
Fan w/24" downrod	37"
Fan w/36" downrod	49"
Fan w/48" downrod	61"
Fan w/60" downrod	73"
Fan w/72" downrod	85"

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	98	4909	63	0.66	78
Med	65	3102	82	0.51	38
Low	44	1762	92	0.38	19

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available (satin nickel finish only).

BLADES:

A set of 5 wood blades are included with this fan. Optional wood blades are available in black (BW4210BL) and white (BW4210WH) finishes—sold separately. See our catalog or visit www.fanimation.com for more information.

CONTROL OPTIONS:

C20 hand-held, reversing remote control and canopy-style receiver unit (RECAN68) are included. Push button control with frequency code settings located on both the transmitter and the receiver units. Each push button unit will consist of 3 separate fan speeds, infinite light levels, reverse and off buttons. Optional C21 wall control is available (to be used in conjunction with fan receiver). C4-220 remote control is included with 220V models. Instructions are provided with each control.

LIGHTING OPTIONS:

3-bulb downlight fixture with three 40-watt candelabra bulbs is included. Maximum downlight wattage not to exceed 120 watts.

DOWNROD OPTIONS:

Fan comes with a 1/2" dia. x 6" long downrod (DR6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.



10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website www.fanimation.com

