


The Windpointe®

UNI-PACK SERIES FANS

FP7300 / FP7400 / FP7500

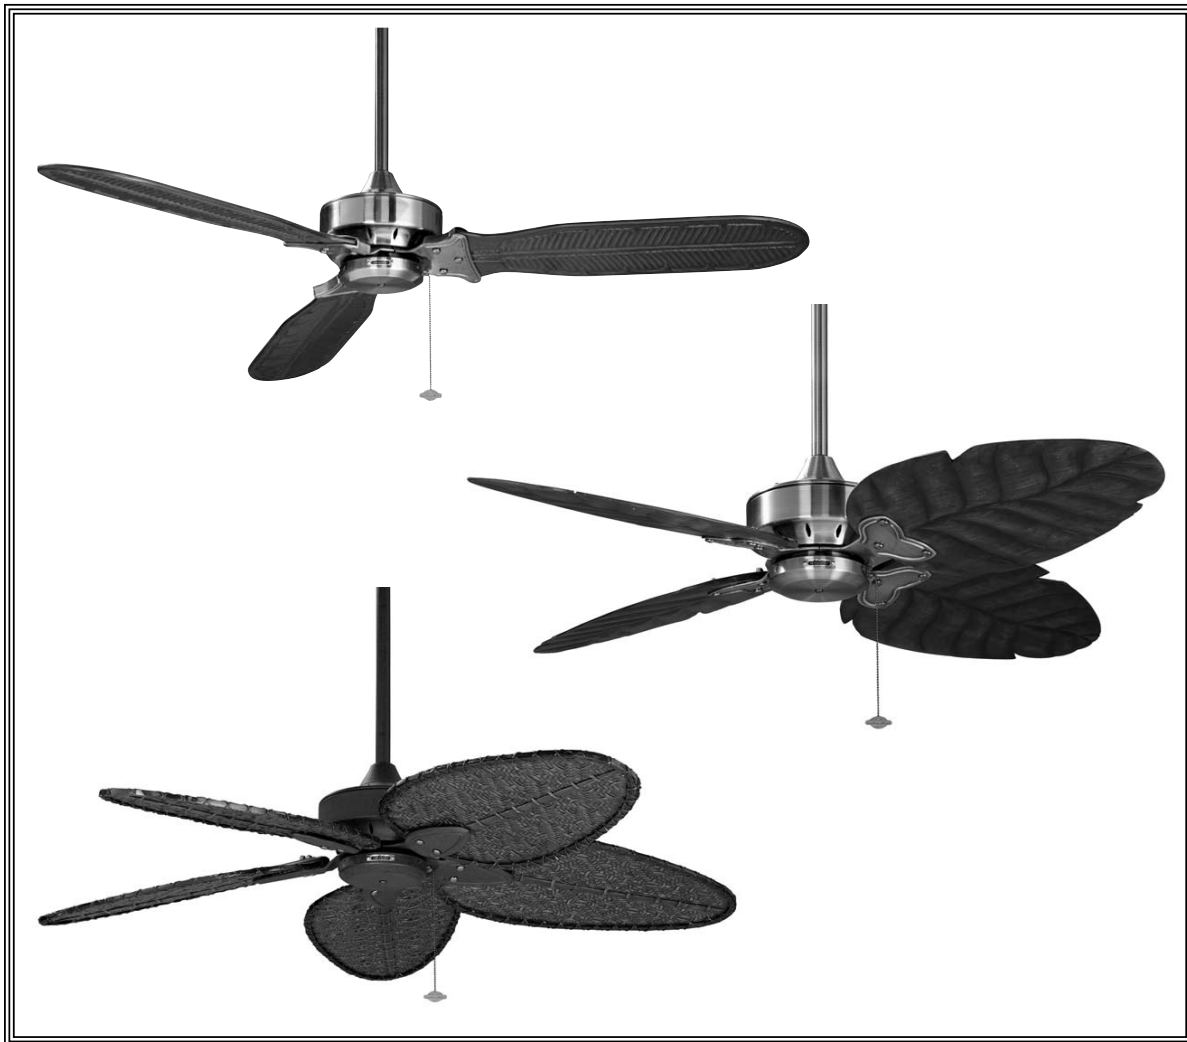


SPECIFICATION SHEET



celebrating 25 years

Product Specifications subject to change

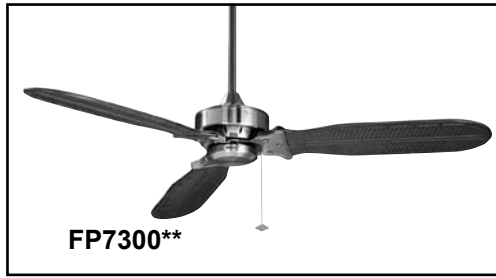

3 – Blade Style Model

FP7300 Series – 3 Blades					
Available Uni-Packed Finishes					
Fan Motor Assembly (188 x 25)	Blades (14° Pitch)	Blade Sweep	Ceiling to Blade Bottom Edge	Ceiling to Switch Cup	RPM's (H / M / L)
FP7300PW – Pewter	B2000CP – Wood	60"	13½"	14½"	125 / 95 / 60
FP7300RS – Rust (Damp)	B3000BW – Wide Oval, Woven	56"	15"	14½"	120 / 95 / 50
220V Model					
FP7300RS-220 – Rust (Damp)	B3000BW – Wide Oval, Woven	56"	15"	14½"	120 / 85 / 50

FP7300PW Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	112	5301	99	0.45	54
Med	93	4171	111	0.38	38
Low	57	2514	152	0.25	17

FP7300RS Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	95	4087	76	0.45	53
Med	86	3307	88	0.38	38
Low	68	1939	118	0.25	17

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version is available.

CONTROL OPTIONS:

Optional C1, C2 and C25* wall controls and C4 remote control with receiver unit are available—sold separately. Instructions are provided with each control.

*C25 wall control must be used with C4 remote control

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for lighting options.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call technical support for more information.

BLADES:

A set of three blades is included.

LOCATION USE:

FP7300PW is rated for dry locations only.

FP7300RS is rated for dry and damp locations.



4 – Blade Style Model

FP7400 Series – Wood, 4 Blades					
Available Uni-Packed Finishes					
Fan Motor Assembly (188 x 25)	Blades - Wood (14° Pitch)	Blade Sweep	Ceiling to Blade Bottom Edge	Ceiling to Switch Cup	RPM's (H / M / L)
FP7400AB – Antique Brass	B4010CP – Cairo Purple Wood	52"	14"	14½"	175 / 120 / 70
FP7400RS – Rust	B4020SS – Sambel Sand Wood	52"	14"	14½"	160 / 110 / 65
220V Model					
FP7400RS-220 – Rust	B4020SS – Sambel Sand Wood	52"	14"	14½"	160 / 110 / 65

FP7400AB Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	170	5129	104	0.42	49
Med	131	3867	124	0.34	31
Low	79	2257	165	0.22	14

FP7400RS Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	145	4240	86	0.42	50
Med	110	3101	100	0.34	31
Low	67	1733	127	0.22	14

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version is available.

BLADES:

A set of four wood blades is included.

CONTROL OPTIONS:

Optional C1, C2 and C25* wall controls and C4 remote control with receiver unit are available—sold separately. Instructions are provided with each control.

*C25 wall control must be used with C4 remote control

LIGHTING OPTIONS:


Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for lighting options.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call technical support for more information.

LOCATION USE:

Fans are rated for dry locations only.

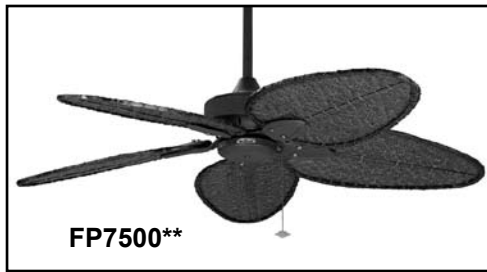

5 – Blade Traditional Style Model

FP7500 Series – Traditional, 5 Blades

Available Uni-Packed Finishes

Fan Motor Assembly (188 x 25)	Blades - Palm/Bamboo (18° Pitch)	Blade Sweep	Ceiling to Blade Bottom Edge	Ceiling to Switch Cup	RPM's (H / M / L)
FP7500AB – Antique Brass	ISP4 – 22" Narrow Oval Palm	52"	14"	14½"	90 / 65 / 40
FP7500MW – Matte White	ISP5 – 18" Narrow Oval Palm	44"	14"	14½"	120 / 95 / 50
FP7500RS – Rust (Damp)	ISD4A – 22" Narrow Oval Bamboo	52"	14"	14½"	95 / 70 / 40
220V Models					
FP7500AB-220 – Antique Brass	ISP4 – 22" Narrow Oval Palm	52"	14"	14½"	90 / 65 / 40
FP7500RS-220 – Rust (Damp)	ISD4A – 22" Narrow Oval Bamboo	52"	14"	14½"	90 / 70 / 40

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version is available.

BLADES:

A set of five blades is included.

CONTROL OPTIONS:

Optional C1, C2 and C25* wall controls and C4 remote control with receiver unit are available—sold separately. Instructions are provided with each control.

*C25 wall control must be used with C4 remote control

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for lighting options.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call technical support for more information.

LOCATION USE:

FP7500AB and FP7500MW are rated for dry locations only. FP7500RS is rated for dry and damp locations.

FP7500AB Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	86	2633	63	0.37	42
Med	82	2337	68	0.34	34
Low	57	1420	86	0.23	17

FP7500MW Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	122	2812	67	0.37	42
Med	109	2501	73	0.33	35
Low	75	1600	96	0.23	17

FP7500RS Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	95	2551	60	0.37	42
Med	86	2272	65	0.34	35
Low	68	1175	71	0.23	17



Copyright 2009 Fanimation, Inc.

10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215
Outside U.S. call (317) 733-4113
Visit Our Website www.fanimation.com



2009/01