


# **The Americana<sup>®</sup>**

**FP410 / FP420 Series**




## **SPECIFICATION SHEET**

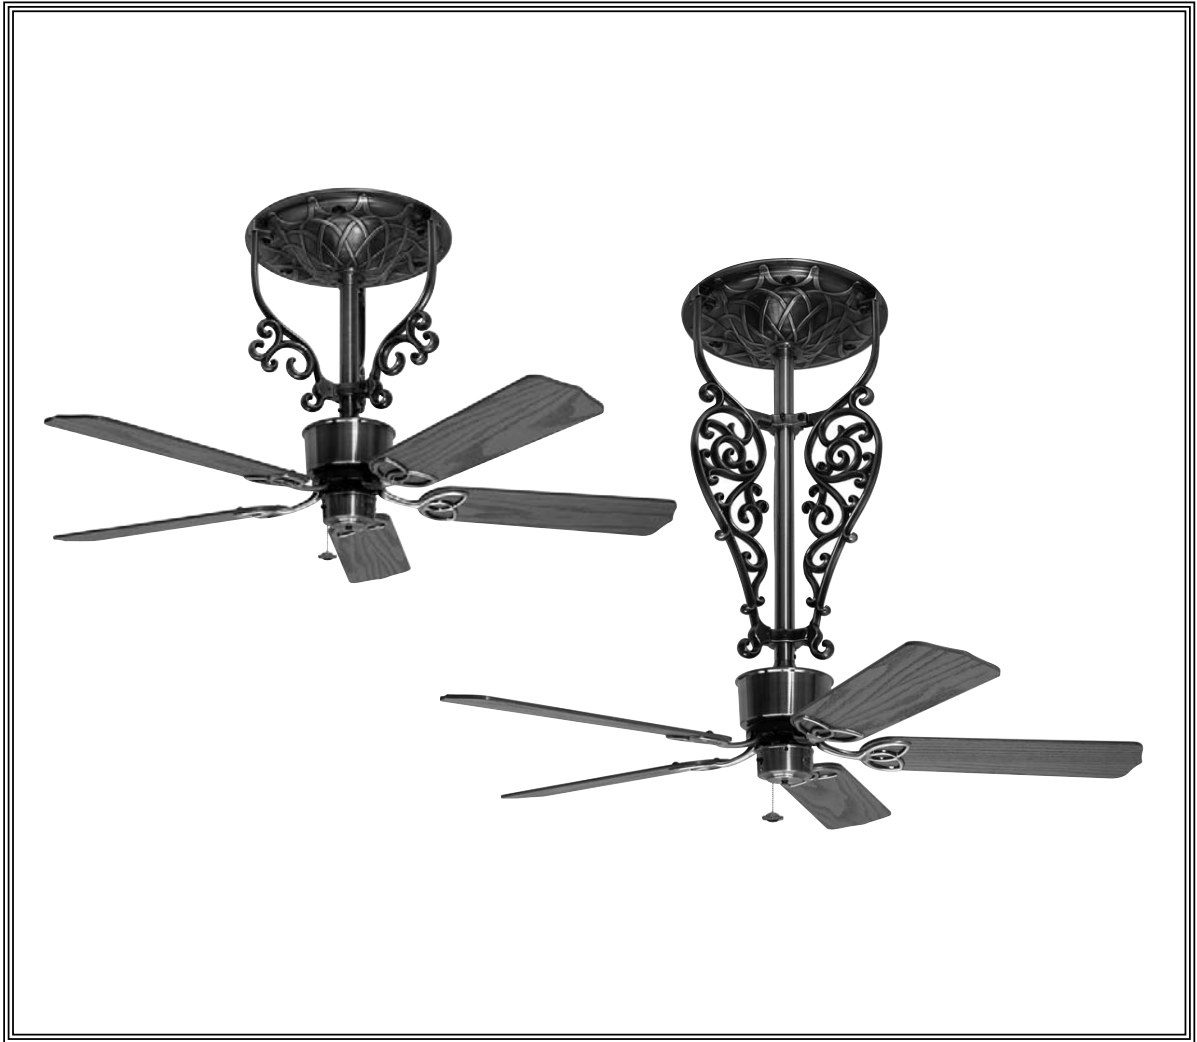

celebrating 25 years


*Product Specifications subject to change*

# The Americana® Fan Assembly

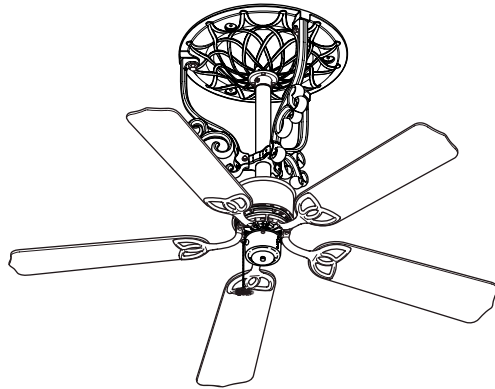

<b>Short Fan Assembly - FP410**</b>	
Overall Height (w/o Light Kit)	25"
Blade Sweep	52"
Base Diameter	16¾"
Mounting Diameter (3-hole; centerline)	13"
Weight: (w/o Light Kit)	32 lbs

*Dimensions shown in inches*

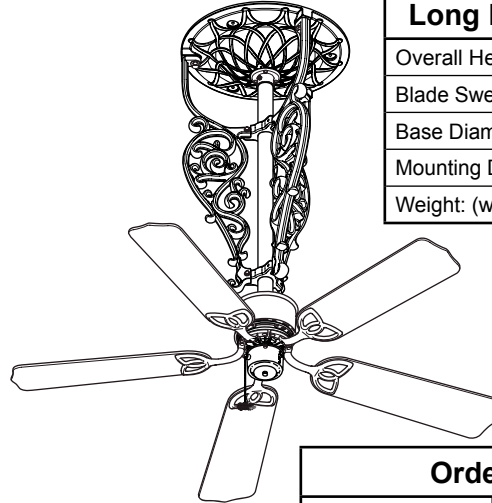

<b>Long Fan Assembly - FP420**</b>	
Overall Height (w/o Light Kit)	39"
Blade Sweep	52"
Base Diameter	16¾"
Mounting Diameter (3-hole; centerline)	13"
Weight: (w/o Light Kit)	41 lbs

*Dimensions shown in inches*

<b>** Available Finishes</b>	
AB	Antique Brass
BL	Black

<b>Ordering Information</b>	
Catalog No.	Description
FP410**	Short Fan Assembly
FP420**	Long Fan Assembly
FP1018	Reversible Oak/Walnut Blade Set (sold separately)

## INSTALLATION REQUIREMENTS:

Requires 3/4" plywood wall backing, able to support at least 100 lbs. Fan base is secured to 3/4" plywood backing using three 5/16" lag bolts. Ceiling backing to be supplied by owner or contractor.

## ELECTRICAL REQUIREMENTS:

Surface mounted electrical junction box centered in mounting location with a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

## MOTOR SPECS:

FK2100 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available (antique brass only). Reversing switch and 3-speed pull-chain included.

## FAN SPEEDS:

Speeds will vary according to blade set—material, shape and size of blade. In general, smaller blades will turn faster than bigger ones and narrower blades will turn faster than wider ones.

## BLADES:

A variety of 4- and 5-blade sets are available. 5-blade sets are available in palm, bamboo, wood and composite materials. 4-blade sets are made of wood and require the use of BH20 series blade holders (not included). 4-blade sets will increase speed and airflow. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for blade options.

## CONTROL OPTIONS:

Optional C1 and C2 wall controls available—sold separately. Optional C20 remote control and C21 wall control available with use of optional SW50 switch cap receiver—all sold separately. Instructions are provided with each control.

## LIGHTING OPTIONS:

Optional lighting fitters and light kits are available—see our catalog or visit [www.fanimation.com](http://www.fanimation.com).

## LOCATION USAGE:

Fan is rated for dry locations only.



**10983 Bennett Parkway  
Zionsville, IN 46077  
Toll Free (888) 567-2055  
FAX (866) 482-5215**

**Outside U.S. call (317) 733-4113**

**Visit Our Website [www.fanimation.com](http://www.fanimation.com)**

